



## X-Vision Outdoor series

It is an intelligent, modular splicing LED display. There are power and lamp board in one module(3 in 1-lamp, drive and system), it is light and thin with single signal line which is easy for splicing.


It is a civilian intelligent DIY product which can be controlled by mobile phone and tablet.

Pixel Pitch	Unit size
X2.5-O	320mm*320mm*45mm
X3-O	2.45kg/panel
X4-O	
X5-O	

[GET A QUOTE](#)

## DIY splicing freely

It meets the demand for DIY modules of end clients, and can splice various models easily like the children play toy bricks, making LED display really step into commercial or civil market.

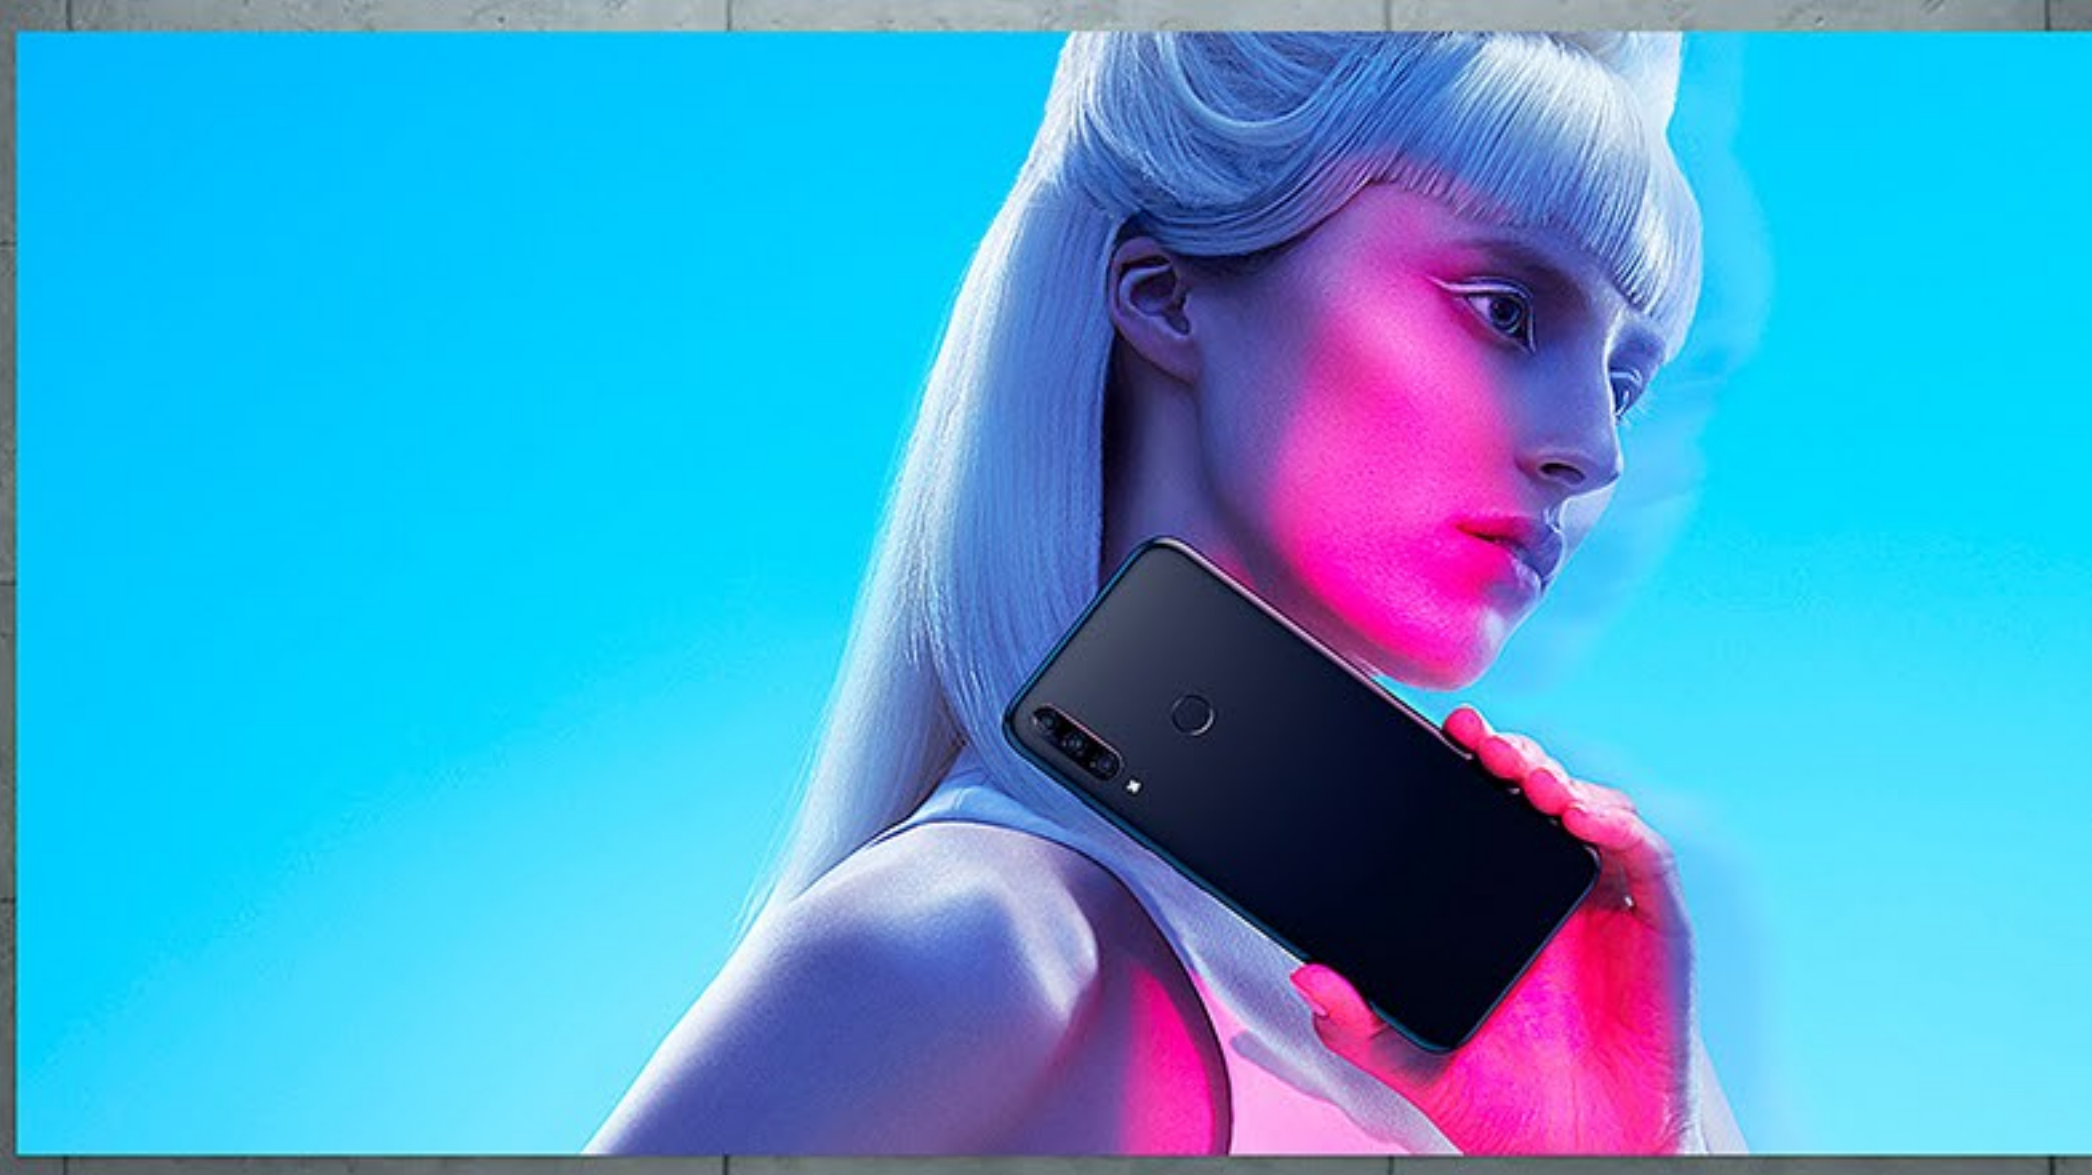

## Smart, mobile phone controls

It is already a terminal product. Users don't have to bother to study technology of it. With goodish APP and software, the display can be easily controlled and played by mobile phone or tablet.



## Light and thin.

Lamp board, system and drive are integrated into one module(3 in 1)  
Integrates power, lamp board, drive and system into one module, which makes the size of the module to be only 320\*320mm. And the weight is only 2.45K




## Waterproof grade IP66


All-aluminum cover plate and one-piece design, Better waterproof performance!  
Excellent heat dissipation performance and longer service life! Higher splicing accuracy!



## Support 100% front&rear maintenance

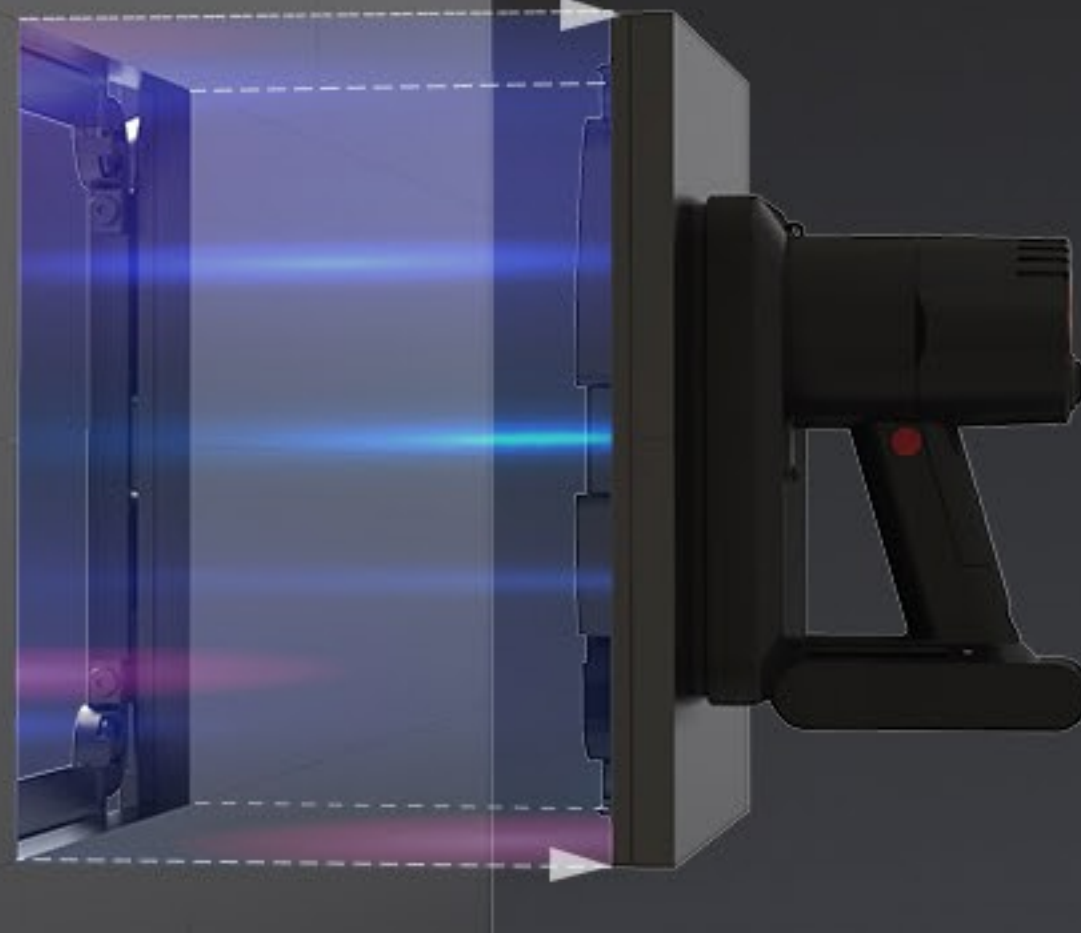

## Simple fixed Installation Procedure

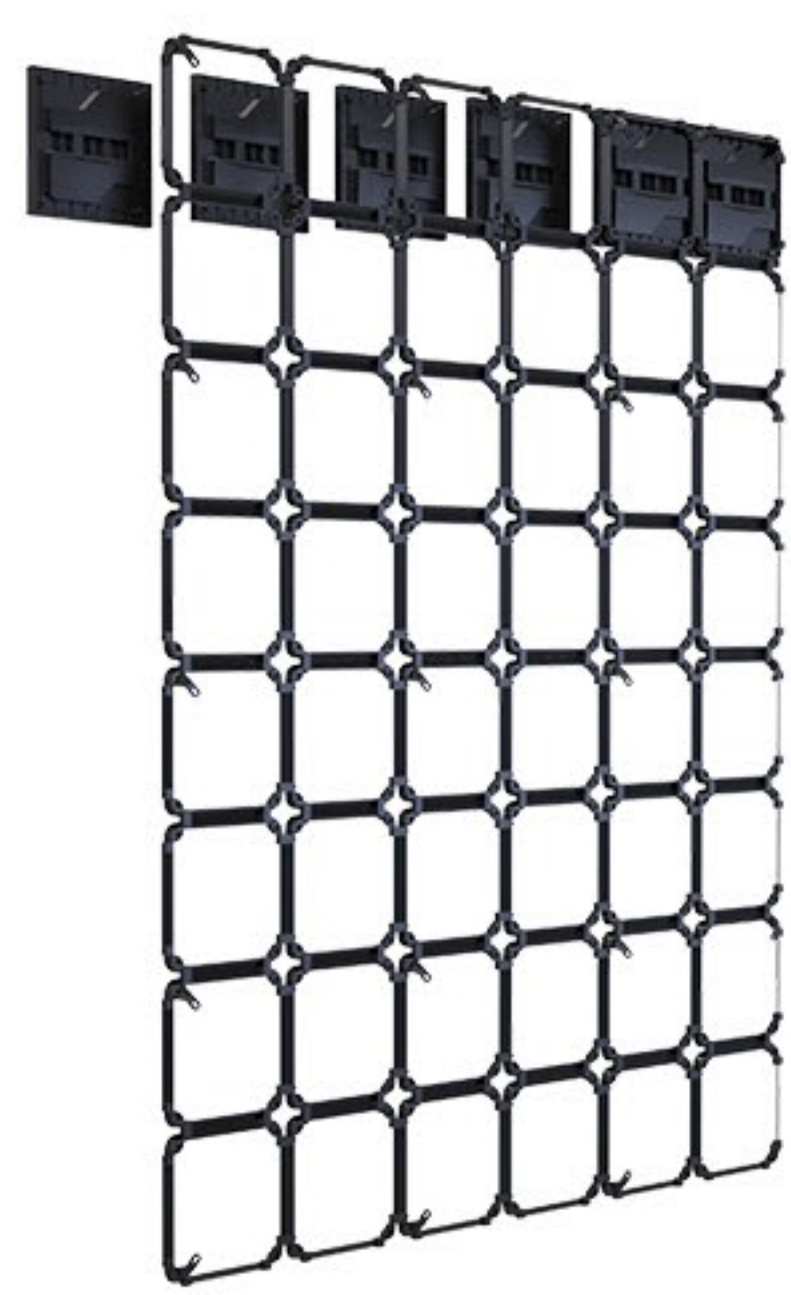

1.Splice panel



2.Connect power and signal 2-in-1 cable



3.Fix screen and play

Model	X2.5-O	X3-O	X4-O	X5-O	X6-O	X8-O	X10-O
Pixel Pitch	2.5mm	3.076mm	4mm	5mm	6.66mm	8mm	10mm
LED Configuration	SMD1515	SMD1515	SMD2525	SMD2525	SMD2525	SMD3535	SMD3535
Pixel Density(m2)	16000Dots/㎡	105625Dots/㎡	62500Dots/㎡	40000Dots/㎡	22500Dots/㎡	15625Dots/㎡	10000Dots/㎡
Module Dimensions(mm)	320X320	320X320	320X320	320X320	320X320	320X320	320X320
Module Resolution	128*128	104*104	80*80	64*64	48*48	40*40	32*32
Scanning Mode	1/16	1/13	1/10	1/8	1/6	1/5	1/2
Brightness(cd/m2)	≥3500cd/㎡	≥4000cd/㎡	≥5000cd/㎡	≥4500cd/㎡	≥4500cd/㎡	≥4500cd/㎡	≥5500cd/㎡
Gray Scale(bit)	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits	14-16bits
Refresh Rate(Hz)	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz	3840Hz
*PowerConsumption(Max/Avg W/m2)*	≤848W/㎡	≤786W/㎡	≤909W/㎡	≤836W/㎡	≤892W/㎡	≤866W/㎡	≤857W/㎡
Cabinet Size	320X320X45mm						
Cabinet Resolution	320X160X14.5mm						
Cabinet Weight(kg/pcs)	2.45kg						
Curved Angle(°)	0°						
Viewing Angle(H°V)	140° /140°						
IP Rating (Front/Rear)	IP66						
Maintenance Mode	Front or Rear						
Installation Mode	Hanging and Stacking						
Input Voltage(V)	100-240V~50/60Hz						
Temperature Range(°C)	Operation:-10°C~+40°C						
Operating Humidity	10-90% RH						
Service Life	100000H						

**X-VISION**